


## PRODUCT - INFORMATION # 07/ 2014

**New at HL**



### HL520FE

**Trap for shower trays DN40/50 for waste holes Ø90mm**

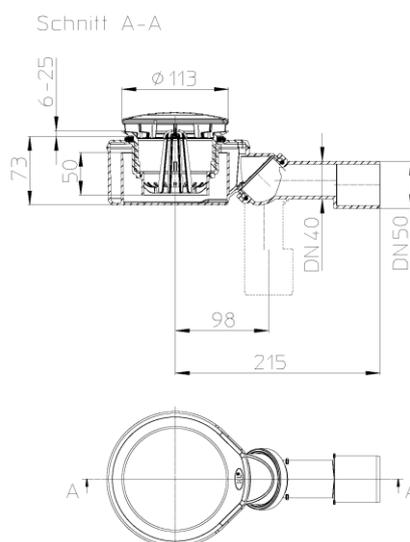

#### **Product description**

HL520FE is a tool for professional installment of shower trays because of its flexibility and precision during installment. Because of its low construction height (73mm) and various connection options (vertical or horizontal, DN40 or DN50) it is perfect for many difficult installation situations, e.g. for renovation. The high drainage capacity ensures maximum showering pleasure for the bath user.

**Maximal flow rate, flexible outlet, low installment height**

### Attitudes:

- **Installation:**  
By using the enclosed blanking plate / mounting wrench the screw valve is connected to the valve seal and the drain body with the shower tray.  
At the same time the installation key protects against contamination during construction. Due to the ball joint only ONE PRODUCT is necessary for vertical and horizontal connection. The joint also facilitates the installation by setting the proper pipe slope.
- **Cleaning:** Only two steps are necessary:
  1. Remove cover
  2. Pull out and clean hair sieve.
- **Hair sieve:** This sieve prevents the siphon and the drainage pipe from congestions in advance. In contrary to the standard article HL520F, which is equipped with a removable siphon inlet, the access to the drainage pipe is not possible!
- **Gasket:** Is fixed on the drain body and prevents the gasket to be lost.
- **Connection:** DN40/50, for plugging or welding, rotatable for horizontal or vertical connection.
- **Installation height:** only 73mm!
- **Flow rate horizontally:** DN40+DN50 - **0,6 l/s** (Standard EN274 → 0,4 l/s)
- **Flow rate vertically:** DN40 - **0,7 l/s** DN50 - **0,8 l/s**

<p><b>HL0520.0E</b>  <b>Lot cover/installation aid (PP)</b></p>	
<p><b>HL522.3E</b>  <b>Cover</b> Ø113mm stainless steel,  unpolished</p>	
<p><b>HL0520F.3E</b>  <b>Hair sieve (PP)</b></p>	
<p><b>HL0520.1E</b>  <b>Waste valve (PP)</b>  Clamping range  from <b>6-25mm</b></p>	
<p><b>HL01108D</b>  <b>Gasket (NK/SBR) for a safe connection</b>  between trap and shower</p>	
<p><b>Drain body (PP) with</b>  <b>height (incl. gasket - 73mm)</b></p> <p><b>Outlet DN40/50 (PE)</b>  adjustable from horizontal to vertical, for  plugging or welding connection</p>	
<p><b>Package:</b> 5 pieces in carton box; 270 pieces / pallet  <b>Weight:</b> 502g net  <b>Price:</b> see price list  <b>Available from:</b> 1st of December 2014</p>	

**HL HUTTERER & LECHNER GmbH**, Brauhausgasse 3 -5 , 2325 HIMBERG,  
Tel.: +43/(0)2235/86291-0; FaxDW 31 od. 52; <http://www.hutterer-lechner.com>; e-mail: [office@hutterer-lechner.com](mailto:office@hutterer-lechner.com)